



Arclux Mini

8 373 063 009

2 × 2 W, 101 lm, blue

Window reveal luminaire 6° / 180°

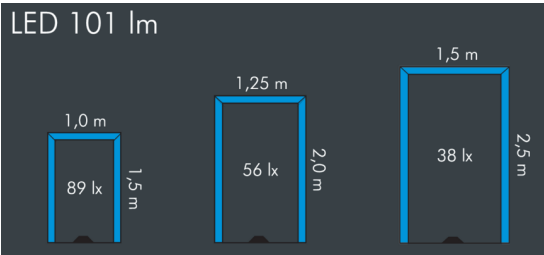

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, 4 holes Ø 6 mm, spacing 200 mm x 88 mm, cable gland: M20, connecting terminal: 3 pole, high-end optical system with specially designed reflectors achieve a uniform arch of light, integral driver (AC/DC), max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 101 lm, wattage: 4 W, delivered lumens 25 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions (L×H×W): 230 × 59 × 105 mm, weight 1.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|-------------------|
| Wattage | 4 W | Housing colour | white RAL 9002 |
| Delivered lumens | 25 lm/W | Power supply cable | Ø 6 – 13 mm |
| Light source | LED blau | Protection type | IP67 |
| Colour tolerance | max 2 SDCM | Protection class | I |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK08 |
| Control gear | on / off | Dimensions | 230 × 59 × 105 mm |
| Input voltage AC | 100 – 240 V | Weight | 1,30 kg |
| Input voltage DC | 195 – 240 V | Max. ambient temperature ta | 45° |
| Voltage protection | 2 kV L/N 2 kV L/PE | | |
| Luminaires per B16A / C16A | 50 / 85 | | |