
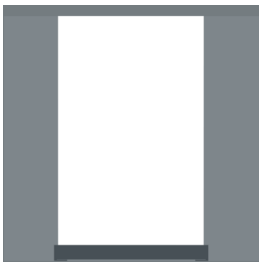
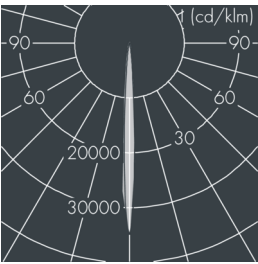


Ecoline

8 793 056 119
11 × 2,1 W, 1357 lm, 3000 K warm white, DALI,
narrow beam 6° ,

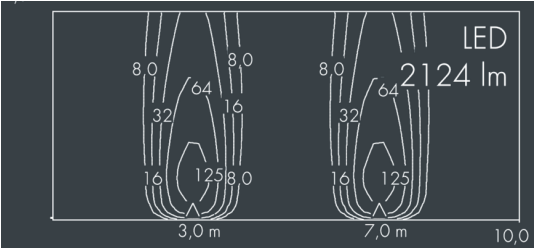

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant
die-cast aluminum AlSi12, polyester powder coated by
high-quality and UV-stabilized coating process, Colour: silver grey
 , all exterior parts are stainless steel, UV stabilised,
impact-resistant polycarbonate cover with partial frosting for
uniform light diffraction, silicon gasket, closure with 2 stainless
steel screws, wall arms: 2 drilled holes Ø 6.5 mm, spacing L2,
tilt range: 220°, cable gland: M20, connecting terminal: 5 pole,
highly efficient optics made of transparent thermoplastic for
precise lighting tasks , integral driver (DALI), CRI > 80,
max 2 SDCM, service life L90/B10 > 50.000 h,
Beam angle (FWHM): 6°, luminous flux: 1357 lm, wattage:
23 W, delivered lumens 59 lm/W, protection type IP65,
protection class I, impact resistance IK10, windage area 0,1 m²,
dimensions (L×H×W): 662 × 57 × 54 mm, weight 2.8 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

Ⓢ IP65 IK10

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------|
| Wattage | 23 W | Beam angle (FWHM) | 6° |
| Delivered lumens | 59 lm/W | Housing colour | silver grey |
| Light source | LED 3000 K | Power supply cable | Ø 6 – 10 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP65 |
| Colour tolerance | max 2 SDCM | Protection class | I |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK10 |
| Control gear | DALI | Windage area | 0,1m² |
| Input voltage AC | 220 – 240 V | Dimensions | 662 × 57 × 54 mm |
| Input voltage DC | 200 – 265 V | Weight | 2,80 kg |
| Voltage protection | 1 kV L/N 2 kV L/PE | Max. ambient temperature ta | 40° |
| Luminaires per B16A / C16A | 28 / 46 | | |