

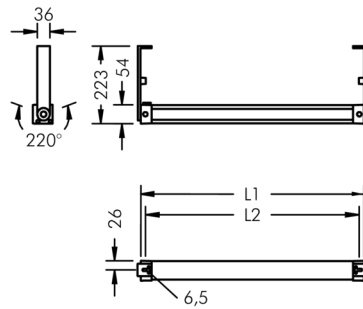


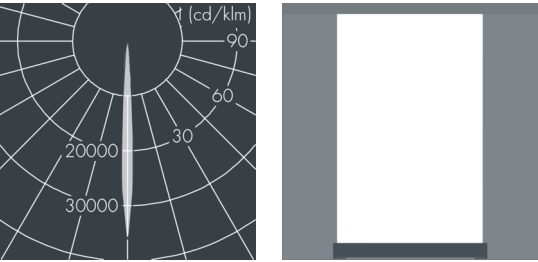

Ecoline

8 793 156 119
17 × 2,1 W, 2124 lm, 3000 K warm white, DALI,
narrow beam 6° ,

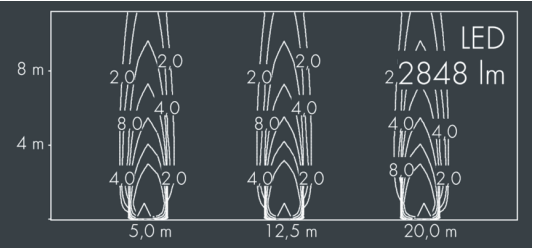

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant
die-cast aluminum AlSi12, polyester powder coated by
high-quality and UV-stabilized coating process, Colour: silver grey
 , all exterior parts are stainless steel, UV stabilised,
impact-resistant polycarbonate cover with partial frosting for
uniform light diffraction, silicon gasket, closure with 2 stainless
steel screws, wall arms: 2 drilled holes Ø 6.5 mm, spacing L2,
tilt range: 220°, cable gland: M20, connecting terminal: 5 pole,
highly efficient optics made of transparent thermoplastic for
precise lighting tasks , integral driver (DALI), CRI > 80,
max 2 SDCM, service life L90/B10 > 50.000 h,
Beam angle (FWHM): 6°, luminous flux: 2124 lm, wattage:
36 W, delivered lumens 59 lm/W, protection type IP65,
protection class I, impact resistance IK10, windage area 0,1 m²,
dimensions (L×H×W): 962 × 57 × 54 mm, weight 2.9 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

Ⓢ IP65 IK10

Specification

Wattage	36 W	Beam angle (FWHM)	6°
Delivered lumens	59 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 6 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK10
Control gear	DALI	Windage area	0,1m²
Input voltage AC	220 – 240 V	Dimensions	962 × 57 × 54 mm
Input voltage DC	200 – 265 V	Weight	2,90 kg
Voltage protection	1 kV L/N 2 kV L/PE	Max. ambient temperature ta	40°
Luminaires per B16A / C16A	28 / 46		