



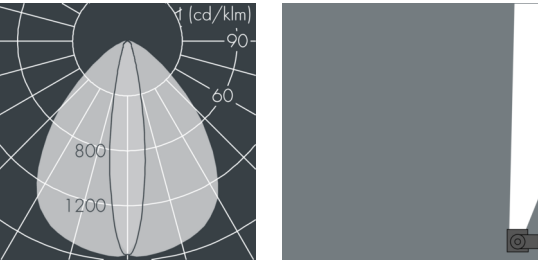

### Ecoline

8 793 169 009  
9 × 4 W, 2011 lm, RGBW (3000 K) DMX,  
wall washer 17° / 87° ,

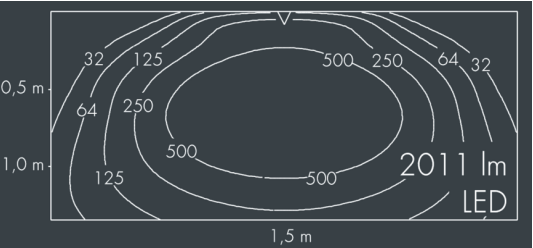

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, wall arms: 2 drilled holes Ø 6.5 mm, spacing L2, tilt range: 220°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks , integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 17° / 87°, luminous flux: 2011 lm, wattage: 36 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,1 m², dimensions (L×H×W): 962 × 54 × 54 mm, weight 3.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

### Specification

|                            |                      |                             |                  |
|----------------------------|----------------------|-----------------------------|------------------|
| Wattage                    | 36 W                 | Beam angle (FWHM)           | 17° / 87°        |
| Delivered lumens           | 56 lm/W              | Housing colour              | white RAL 9002   |
| Light source               | LED RGBW (3000 K)    | Power supply cable          | Ø 6 – 13 mm      |
| Lifetime ta 25° C          | L70/B20 > 50.000 h   | Protection type             | IP65             |
| Control gear               | DMX                  | Protection class            | I                |
| Input voltage AC           | 120 – 250 V          | Impact resistance           | IK10             |
| Input voltage DC           | 120 – 250 V          | Windage area                | 0,1m²            |
| Voltage protection         | 2 kV L/N   2 kV L/PE | Dimensions                  | 962 × 54 × 54 mm |
| Luminaires per B16A / C16A | 38 / 38              | Weight                      | 3,90 kg          |
|                            |                      | Max. ambient temperature ta | 45°              |