





## Ecoline modular system luminaire, middle

8 798 346 109

1,5 × 2,5 W, 2647 lm, 3000 K warm white, DALI, wall washer 12° / 108°

L1 = 1542 mm

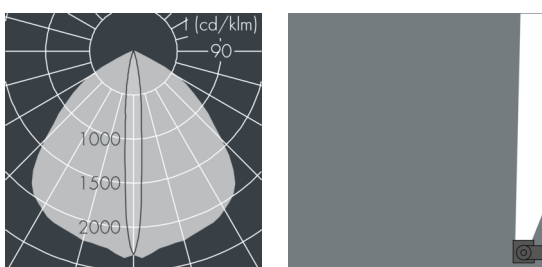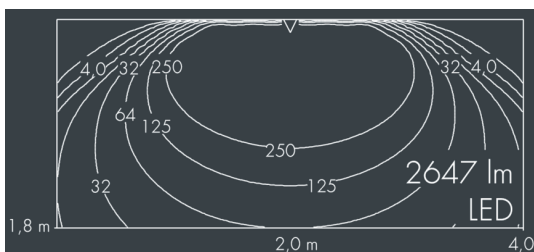

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, with stainless steel couplings on left and right side, tilt range: 220°, cable gland: M20, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 12° / 108°, luminous flux: 2647 lm, wattage: 38 W, delivered lumens 71 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,09 m<sup>2</sup>, dimensions (L×H×W): 1542 × 58 × 54 mm, weight 4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



## Specification

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 38 W                 | Beam angle (FWHM)           | 12° / 108°         |
| Delivered lumens           | 71 lm/W              | Housing colour              | black RAL 7021     |
| Light source               | LED 3000 K           | Power supply cable          | Ø 6 – 10 mm        |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65               |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                  |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK10               |
| Control gear               | DALI                 | Windage area                | 0,09m <sup>2</sup> |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 1542 × 58 × 54 mm  |
| Input voltage DC           | 195 – 255 V          | Weight                      | 4,00 kg            |
| Voltage protection         | 1 kV L/N   2 kV L/PE | Max. ambient temperature ta | 40°                |
| Luminaires per B16A / C16A | 28 / 46              |                             |                    |