




### Fluxa B

8 275 145 009  
for metal halide lamps (HIT-DE)

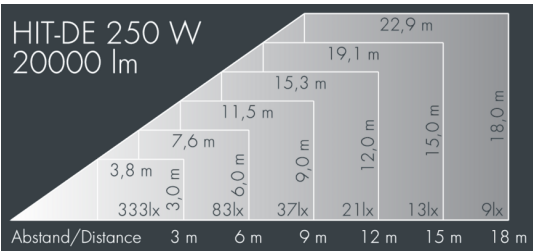

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, 230 mm arm, 2 drilled holes Ø 10.5 mm, spacing 58 mm, cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 20000 lm, wattage: 250 W, delivered lumens 72 lm/W, protection type IP54, protection class I, impact resistance IK09, windage area 0,19 m², dimensions (L×H×W): 730 × 185 × 335 mm, weight 14.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 54 IK09

### Specification

Wattage	250 W	Housing colour	black RAL 7021
Delivered lumens	72 lm/W	Power supply cable	Ø 8 – 15 mm
Light source	LED 4000 K	Protection type	IP54
Control gear	on / off	Protection class	I
		Impact resistance	IK09
		Windage area	0,19m²
		Dimensions	730 × 185 × 335 mm
		Weight	14,70 kg