




63 W, 7103 lm, 3000 K warm white, DALI,
asymmetrical 60°



Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

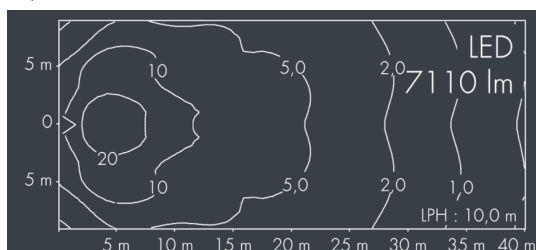

IP 67 IK 08

Wattage	63 W	Housing colour	black RAL 7021
Delivered lumens	113 lm/W	Power supply cable	Ø 8 – 15 mm
Light source	LED 3000 K	Protection type	IP67
Color Rendering Index	CRI > 70	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,11 m²
Control gear	DALI	Dimensions	380 × 131 × 280 mm
Input voltage AC	170 – 260 V	Weight	6,20 kg
Input voltage DC	176 – 276 V	Max. ambient temperature ta	45°
Voltage protection	6 kV L/N 10 kV L/PE		
Luminaires per B16A / C16A	12 / 0		