


Metaspaces

8 215 362 349
4 × 11,5 W, 2169 lm,
2200 K – 3000 K tunable white, Zhaga 18,
asymmetrical beam 63°

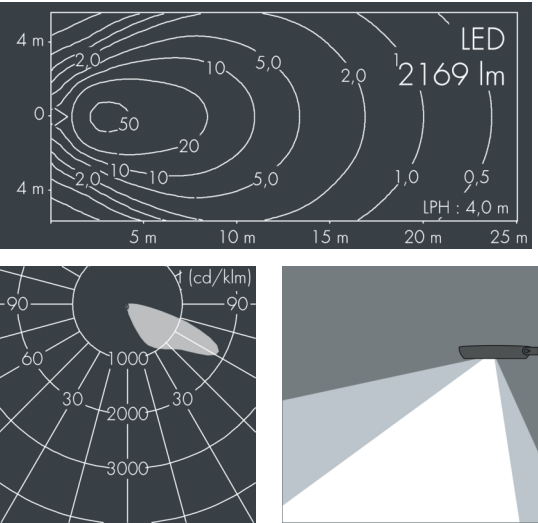

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	28 W
Delivered lumens	78 lm/W
Light source	LED 2200 K – 3000 K
Color Rendering Index	CRI > 80
Control gear	Zhaga 18

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (AC/DC), CRI > 80, luminous flux: 2169 lm, wattage: 28 W, delivered lumens 78 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,056 m², dimensions: Ø 376 mm, width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Housing colour	white RAL 9002
Protection type	IP65
Protection class	I
Impact resistance	IK08
Windage area	0,056 m²
Dimensions	Ø 376 mm, width 112 mm
Weight	5,10 kg
Max. ambient temperature ta	45°