



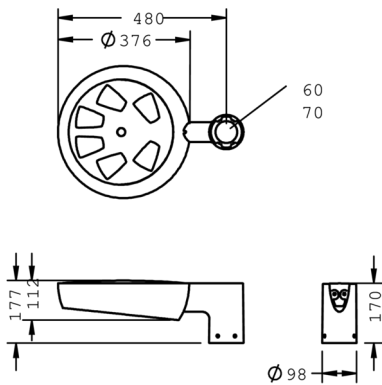

### Metaspace

8 217 352 189  
24 × max. W27 W, 2249 lm,  
2200 K – 3000 K tunable white, DALI,  
asymmetrical wide beam 64° / 133°

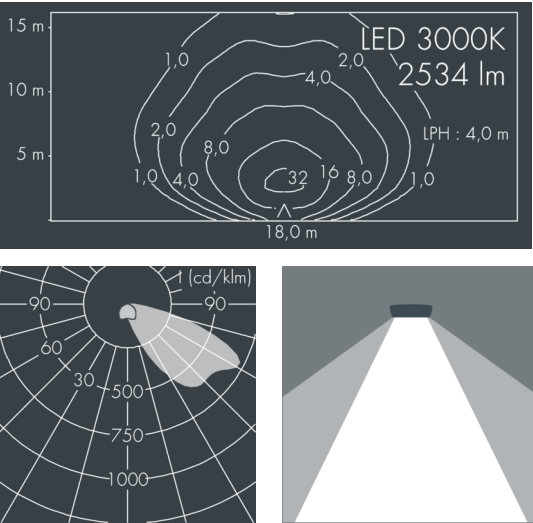

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, Beam angle (FWHM): 64° / 133°, luminous flux: 2249 lm, wattage: 27 W, delivered lumens 82 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m², dimensions: Ø 376 mm, width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



### Specification

|                            |                       |                             |                        |
|----------------------------|-----------------------|-----------------------------|------------------------|
| Wattage                    | 27 W                  | Beam angle (FWHM)           | 64° / 133°             |
| Delivered lumens           | 82 lm/W               | Housing colour              | silver grey            |
| Light source               | LED 2200 K – 3000 K   | Protection type             | IP65                   |
| Color Rendering Index      | CRI > 80              | Protection class            | II                     |
| Control gear               | DALI                  | Impact resistance           | IK08                   |
| Input voltage AC           | 220 – 240 V           | Windage area                | 0,056m²                |
| Input voltage DC           | 176 – 280 V           | Dimensions                  | Ø 376 mm, width 112 mm |
| Voltage protection         | 6 kV L/N   10 kV L/PE | Weight                      | 5,10 kg                |
| Luminaires per B16A / C16A | 35 / 58               | Max. ambient temperature ta | 45°                    |