




## Metaspace High Output

8 218 366 549

6 x 10,8 W, 6072 lm, 3000 K warm white, Zhaga 18 -  
up / down,  
asymmetrical beam 63°

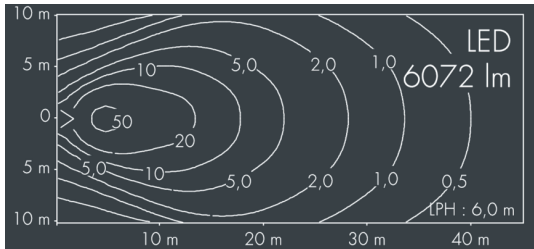

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum ALSi 12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminarie for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho7RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (AC/DC), CRI > 80, 3, service life L80/B20 > 50.000 h, luminous flux: 6072 lm, wattage: 65 W, delivered lumens 93 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m<sup>2</sup>, dimensions (L×H×W): 376 × 112 × 15 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP 65 IK 08

## Specification

Wattage	65 W	Housing colour	white RAL 9002
Delivered lumens	93 lm/W	Protection type	IP65
Light source	LED 3000 K	Protection class	II
Color Rendering Index	CRI > 80	Impact resistance	IK08
Colour tolerance	3	Windage area	0,056m <sup>2</sup>
Lifetime ta 25° C	L80/B20 > 50.000 h	Dimensions	376 × 112 × 15 mm
Control gear	Zhaga 18 - oben / unten	Weight	5,10 kg
Input voltage AC	220 – 240 V	Max. ambient temperature ta	40°
Input voltage DC	220 – 240 V		
Voltage protection	6 kV L/N   10 kV L/PE		
Luminaires per B16A / C16A	10 / 16		