
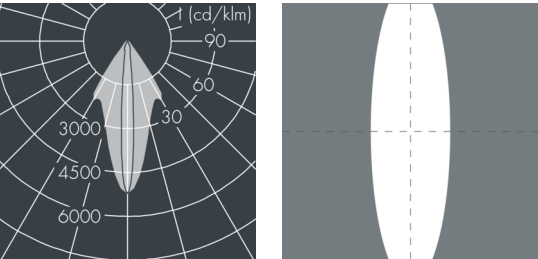


Metaspot 3

8 243 247 329  
67 W, 4644 lm, 2700 K warm white, Zhaga 18,  
linear, vertical 36° / 9°

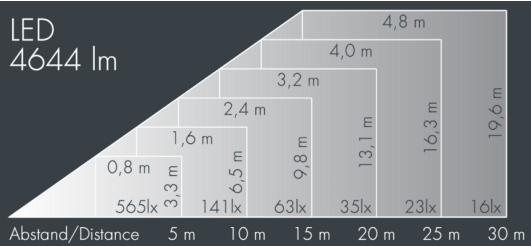

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 40 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, light source completely shielded, high gloss aluminium reflector, integral driver (AC/DC), CRI > 80, 3, service life L80/B10 > 50.000 h, Beam angle (FWHM): 36° / 9°, luminous flux: 4644 lm, wattage: 67 W, delivered lumens 69 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,055 m², dimensions: Ø 201 mm, width 272 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

Ⓜ IP65 IK08

Specification

Wattage	67 W	Beam angle (FWHM)	36° / 9°
Delivered lumens	69 lm/W	Housing colour	black RAL 7021
Light source	LED 2700 K	Power supply cable	Ø 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	3	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	Zhaga 18	Windage area	0,055m²
Input voltage AC	220 – 240 V	Dimensions	Ø 201 mm, width 272 mm
Input voltage DC	220 – 240 V	Weight	5,00 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	10 / 16		