

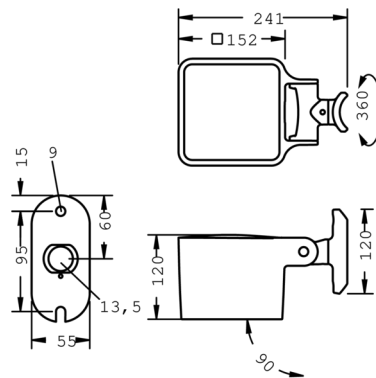


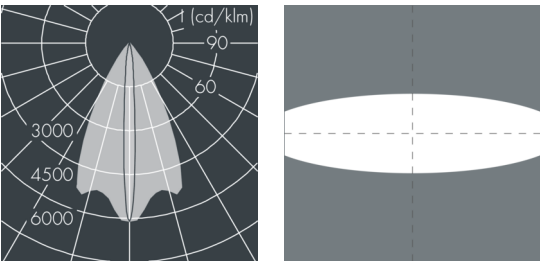

### Monocube 4

8 264 245 339  
16 × 2,3 W, 2901 lm, 4000 K neutral white, Casambi,  
linear, horizontal 7° / 54°

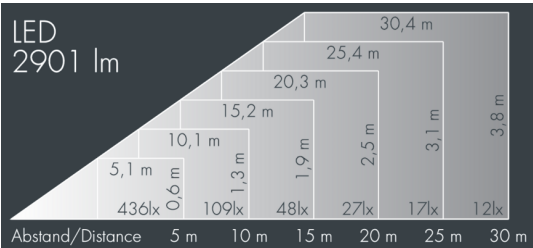

Customized solutions and modifications are possible: Special RAL,  
DB or NCS colours as polyester powder coat, luminaires in  
2700 K and other colour temperatures and versions for high  
ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,  
polyester powder coated by high-quality and UV-stabilized  
coating process, Colour: black RAL 7021, all exterior parts are  
stainless steel, tempered safety glass, anti-reflective coating from  
1 side, dark screenprint, silicon gasket, closure with 4 stainless  
steel screws, for installation on poles Ø 60 - 100 mm, tiltable  
base made of powder coated aluminum, 2 drilled holes Ø 9 mm,  
spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range:  
90°, 360° adjustable, cable gland: M20, connecting terminal:  
3 pole, precise PMMA optics, integral driver (Casambi),  
CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h,  
Beam angle (FWHM): 7° / 54°, luminous flux: 2901 lm,  
wattage: 37 W, delivered lumens 78 lm/W, protection type  
IP65, protection class I, impact resistance IK08, windage area  
0,022 m², dimensions (L×H×W): 152 × 120 × 152 mm, weight  
2.4 kg

The modular luminaire design makes the replacement of  
components possible. The product meets the demands of the  
applicable EU guidelines and product safety regulations and  
bears the CE mark.

IP65 IK08

### Specification

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 37 W                 | Beam angle (FWHM)           | 7° / 54°           |
| Delivered lumens           | 78 lm/W              | Housing colour              | black RAL 7021     |
| Light source               | LED 4000 K           | Power supply cable          | Ø 6 – 13 mm        |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65               |
| Colour tolerance           | max 2 SDCM           | Protection class            | I                  |
| Lifetime ta 25° C          | L90/B10 > 50.000 h   | Impact resistance           | IK08               |
| Control gear               | Casambi              | Windage area                | 0,022m²            |
| Input voltage AC           | 220 – 240 V          | Dimensions                  | 152 × 120 × 152 mm |
| Input voltage DC           | 220 – 240 V          | Weight                      | 2,40 kg            |
| Voltage protection         | 4 kV L/N   2 kV L/PE | Max. ambient temperature ta | 35°                |
| Luminaires per B16A / C16A | 23 / 39              |                             |                    |