

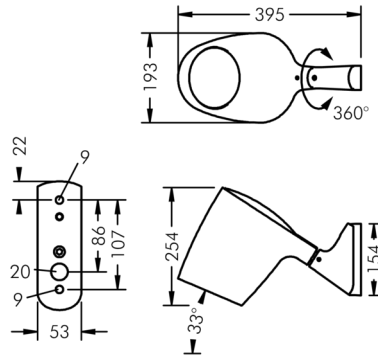





## Monospot+

8 996 446 399

0 W, 3000 K warm white, Zhaga 18, asymmetrical beam 38°

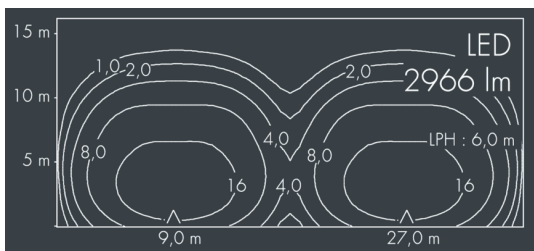

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 40 mm, tilt range: tilt range 33°, swivel range 360°, cable gland: M20, connecting terminal: 3 pole, highly efficient aluminum reflector, integral driver (AC/DC), max 2 SDCM, service life L80/B10 > 50.000 h, wattage: 0 W, protection type IP65, protection class I, impact resistance IK08, windage area 0,049 m², dimensions (L×H×W): 240 × 307 × 215 mm, weight 3.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

## Specification

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 0 W                  | Housing colour              | black RAL 7021     |
| Light source               | LED 3000 K           | Power supply cable          | Ø 6 – 13 mm        |
| Colour tolerance           | max 2 SDCM           | Protection type             | IP65               |
| Lifetime ta 25° C          | L80/B10 > 50.000 h   | Protection class            | I                  |
| Control gear               | Zhaga 18             | Impact resistance           | IK08               |
| Input voltage AC           | 220 – 240 V          | Windage area                | 0,049m²            |
| Input voltage DC           | 220 – 240 V          | Dimensions                  | 240 × 307 × 215 mm |
| Voltage protection         | 2 kV L/N   2 kV L/PE | Weight                      | 3,80 kg            |
| Luminaires per B16A / C16A | 23 / 39              | Max. ambient temperature ta | 45°                |