
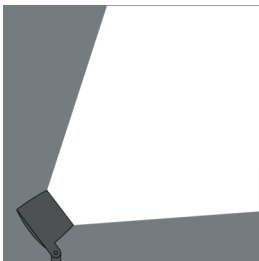



Monospot S4

8 994 056 059
45 W, 3770 lm, 3000 K warm white,
wide beam (with indirect reflector)

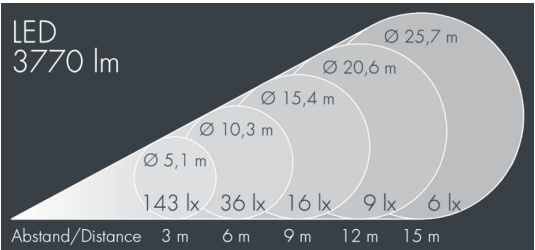

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	45 W
Delivered lumens	83 lm/W
Light source	LED 3000 K
Color Rendering Index	CRI > 80
Control gear	on / off

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes \varnothing 7 mm, spacing 30-40 mm, 1 centre hole \varnothing 17 mm, tilt range: 180° , cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC/DC), CRI > 80, luminous flux: 3770 lm, wattage: 45 W, delivered lumens 83 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions: \varnothing 194 mm, width 124 mm, weight 4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

