




8 902 246 079

**Monospot 2 pole luminaire, linear beam spread, rotatable**

With 15 W high performance LED module (Zhaga), 3000 K

protection class I, IP67, ENEC, IK08  
 housing made of corrosion-resistant die-cast aluminium AlSi12, highly efficient faceted rotationally symmetrical reflector, polyester powder coated by high-quality and UV-stabilized coating process, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, cable gland: M16, integral driver (AC/DC), CRI >80, 3 SDCM, service life L: 90, B: 10 > 50.000 h

Part number	Colour	Light source	weight	beam angle (FWHM)
8 902 246 079	black	15 W high performance LED module (Zhaga), 3000 K	2,30 kg	35° / 8°

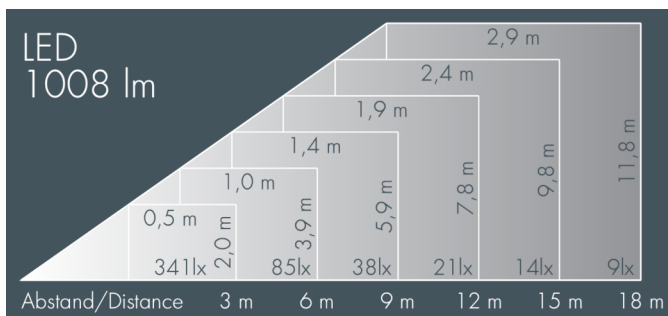



Part number	Colour	Description
1 29 0 733	-	<b>Prismatic glass</b> for diffused light distribution



Part number	Colour	Description
1 29 0 728 940	black	<b>Radial louvre</b> internal (factory fitted), to reduce glare



Part number	Colour	Description
1 29 0 723 940	black	<b>Cowl</b> stainless steel, to avoid glare from 3 directions, for mounting in front of floodlight



Part number	Colour	Description
1 29 0 752	black	<b>Honeycomb louvre</b> internal (factory fitted), to avoid glare