
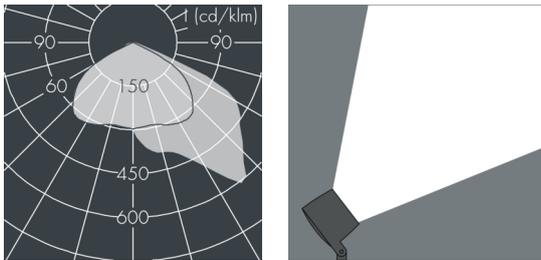


Multispot 3

8 223 047 199

27 W, 2204 lm, 2700 K warm white, DALI, asymmetrical beam

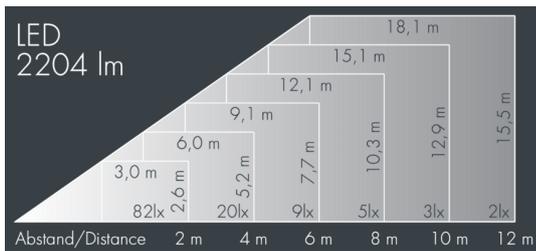

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 2 drilled holes \varnothing 7 mm, spacing 35 mm, 1 centre hole \varnothing 17 mm, tilt range: 170°, cable gland: M20, connecting terminal: 5 pole, PMMA lens, integral driver (AC/DC), CRI > 80, luminous flux: 2204 lm, wattage: 27 W, delivered lumens 82 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0284 m², dimensions: \varnothing 147 mm, width 138 mm, weight 2.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------------------------|
| Wattage | 27 W | Housing colour | black RAL 7021 |
| Delivered lumens | 82 lm/W | Power supply cable | \varnothing 6 – 13 mm |
| Light source | LED 2700 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Control gear | DALI | Impact resistance | IK08 |
| Input voltage AC | 220 – 240 V | Windage area | 0,0284m ² |
| Input voltage DC | 220 – 240 V | Dimensions | \varnothing 147 mm, width 138 mm |
| Voltage protection | 2 kV L/N 4 kV L/PE | Weight | 2,60 kg |
| Luminaires per B16A / C16A | 50 / 85 | Max. ambient temperature ta | 35° |