



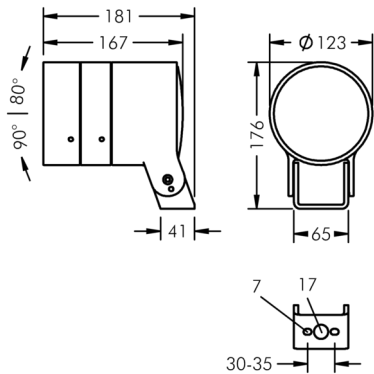

Multispot 2

8 222 147 099
10 W, 449 lm, 2700 K warm white,
asymmetrical beam 67°

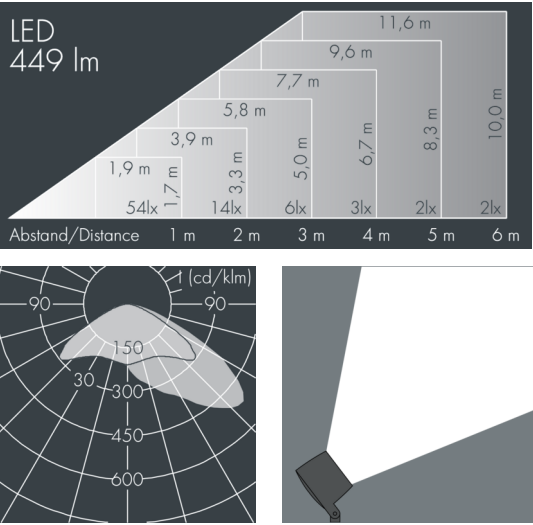

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 32 mm, 1 centre hole Ø 17 mm, tilt range: 170°, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, luminous flux: 449 lm, wattage: 10 W, delivered lumens 45 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0234 m², dimensions: Ø 123 mm, width 130 mm, weight 2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

⚡ IP65 IK08

Specification

Wattage	10 W	Housing colour	black RAL 7021
Delivered lumens	45 lm/W	Power supply cable	Ø 6 – 13 mm
Light source	LED 2700 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B10 > 50.000 h	Windage area	0,0234m²
Control gear	on / off	Dimensions	Ø 123 mm, width 130 mm
Input voltage AC	220 – 240 V	Weight	2,00 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	40°
Voltage protection	2 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	50 / 50		