
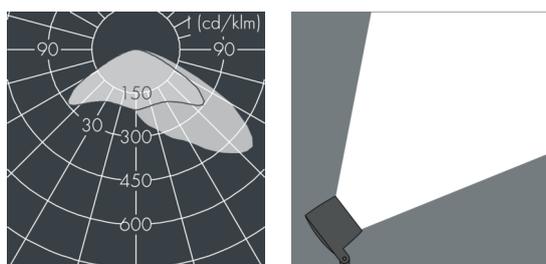


Multispot 2

8 226 146 199

10 W, 475 lm, 3000 K warm white, DALI, asymmetrical beam 67°

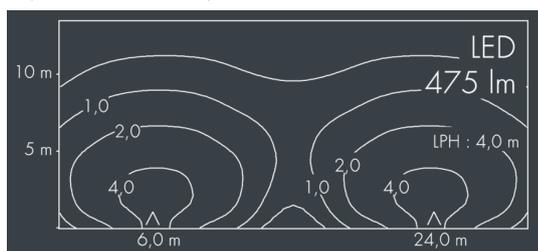

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes \varnothing 9 mm, spacing 97 mm, 1 centre hole \varnothing 13.5 mm, tilt range: 90° , 360° adjustable, cable gland: M20, connecting terminal: 5 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, luminous flux: 475 lm, wattage: 10 W, delivered lumens 48 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0234 m², dimensions: \varnothing 123 mm, width 130 mm, weight 2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	10 W	Housing colour	black RAL 7021
Delivered lumens	48 lm/W	Power supply cable	\varnothing 6 – 13 mm
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B10 > 50.000 h	Windage area	0,0234m ²
Control gear	DALI	Dimensions	\varnothing 123 mm, width 130 mm
Input voltage AC	220 – 240 V	Weight	2,00 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	40°
Voltage protection	2 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	50 / 50		