



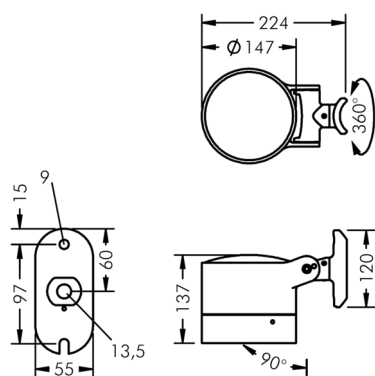

8 227 366 129

Abstand/Distance	3 m	6 m	9 m	12 m	15 m	18 m
Beam Diameter	1,2 m	2,4 m	3,6 m	4,8 m	6,0 m	7,3 m
Illuminance (lx)	339lx	85lx	38lx	21lx	14lx	9lx

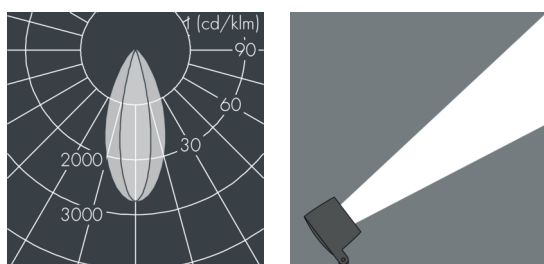

Specification

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes Ø 9 mm, spacing 97 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, Beam angle (FWHM): 22° / 45°, luminous flux: 1841 lm, wattage: 27 W, delivered lumens 68 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0284 m², dimensions: Ø 147 mm, width 137 mm, weight 2.6 kg

Ⓢ IP65 IK08

Wattage	27 W	Beam angle (FWHM)	22° / 45°
Delivered lumens	68 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,0284m²
Input voltage AC	220 – 240 V	Dimensions	Ø 147 mm, width 137 mm
Input voltage DC	220 – 240 V	Weight	2,60 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°
Luminaires per B16A / C16A	50 / 85		