
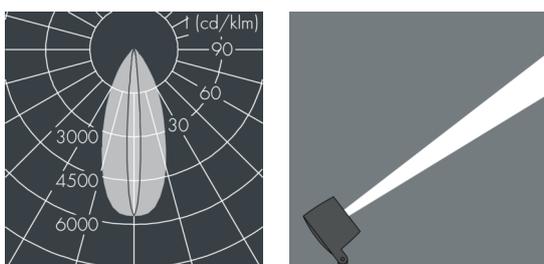


Multispot 3

8 227 858 019

27 W, 1315 lm, 2200 K warm white,
narrow beam 10° / 40°

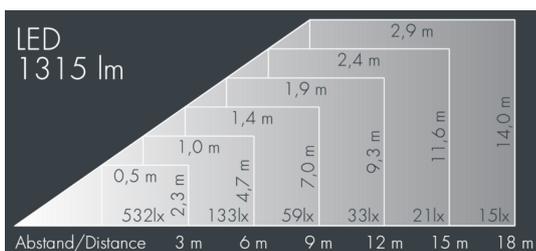

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes \varnothing 9 mm, spacing 97 mm, 1 centre hole \varnothing 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, Beam angle (FWHM): 10° / 40°, luminous flux: 1315 lm, wattage: 27 W, delivered lumens 49 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,031 m², dimensions: \varnothing 147 mm, width 137 mm, weight 2.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|-----------------------|--------------------|-------------------|------------------------------------|
| Wattage | 27 W | Beam angle (FWHM) | 10° / 40° |
| Delivered lumens | 49 lm/W | Housing colour | silver grey |
| Light source | LED 2200 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Colour tolerance | max 2 SDCM | Impact resistance | IK08 |
| Lifetime ta 25° C | L80/B10 > 50.000 h | Windage area | 0,031 m ² |
| Control gear | on / off | Dimensions | \varnothing 147 mm, width 137 mm |
| | | Weight | 2,60 kg |