



## Nanodot

8 400 017 099

1.5 W, 135 lm, 2700 K warm white,  
asymmetrical beam 43°

Remote control gear unit essentially required, see  
data sheet with accessories

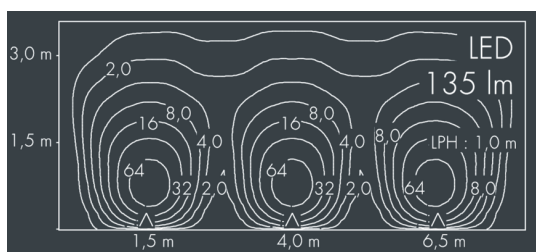

## Specification text

luminaire made of corrosion-resistant stainless steel (V4A), Colour: stainless steel (V4A), all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, installation housing made of fibreglass reinforced plastic, cable gland:

2 x 130 mm FEP single wires and 2 x IP67 silicone-potted pressure clamp connectors, for flush mounting into round handrails, suitable for outer diameter 38 - 45 mm, precise light control with miniature polycarbonate optic, 80, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 135 lm, wattage: 1.5 W, delivered lumens 96 lm/W, protection type IP65, protection class III, impact resistance IK10, dimensions: Ø 20 mm, width 34 mm, weight 0.02 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK10

## Specification

Wattage	1.5 W	Housing colour	stainless steel (V4A)
Delivered lumens	96 lm/W	Protection type	IP65
Light source	LED 2700 K	Protection class	III
Color Rendering Index	80	Impact resistance	IK10
Colour tolerance	max 2 SDCM	Dimensions	Ø 20 mm, width 34 mm
Lifetime ta 25° C	L90/B10 > 50.000 h	Weight	0,02 kg
Control gear	on / off / DALI	Max. ambient temperature ta	40°
Input voltage DC	2,8 V		