
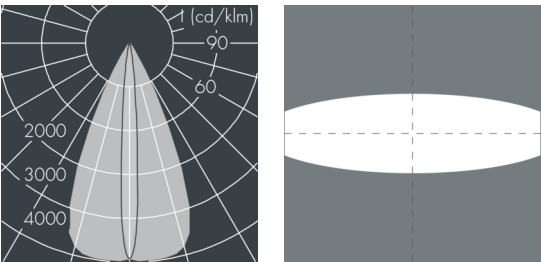


### Nightfocus

8 395 055 029  
5 × 1 W, 505 lm, 4000 K neutral white,  
linear beam spread, vertical, gimbal mounted, adjustable  
47° / 8°

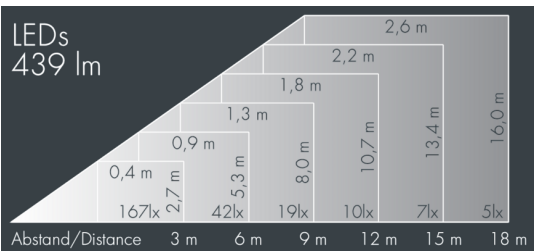

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, wall mounting: 2 drilled holes Ø 7 mm, spacing 60 mm, cable gland: up to Ø 13 mm, recessed or surface mounted cable, connecting terminal: 3 pole, gimbal mounted, tilt range: 0-15°, integral control gear, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 47° / 8°, luminous flux: 505 lm, wattage: 7 W, delivered lumens 72 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,025 m², dimensions (L×H×W): 191 × 110 × 130 mm, weight 3,657 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

### Specification

|                       |                      |                   |                    |
|-----------------------|----------------------|-------------------|--------------------|
| Wattage               | 7 W                  | Beam angle (FWHM) | 47° / 8°           |
| Delivered lumens      | 72 lm/W              | Housing colour    | silver grey        |
| Light source          | LED 4000 K           | Protection type   | IP65               |
| Color Rendering Index | CRI > 80             | Protection class  | I                  |
| Colour tolerance      | max 2 SDCM           | Impact resistance | IK08               |
| Lifetime ta 25° C     | L90/B10 > 50.000 h   | Windage area      | 0,025m²            |
| Control gear          | on / off             | Dimensions        | 191 × 110 × 130 mm |
| Input voltage AC      | 220 – 240 V          | Weight            | 3,66 kg            |
| Voltage protection    | 1 kV L/N   0 kV L/PE |                   |                    |