
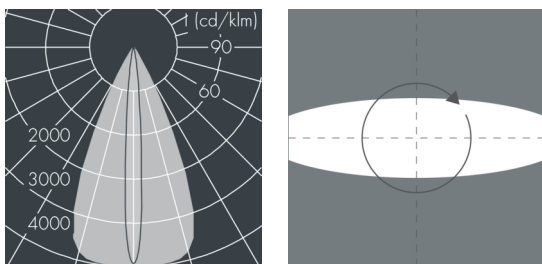


Nightfocus

8 395 066 029

5 × 1 W, 439 lm, 3000 K warm white,
linear beam spread, vertical, gimbal mounted, adjustable
47° / 8°

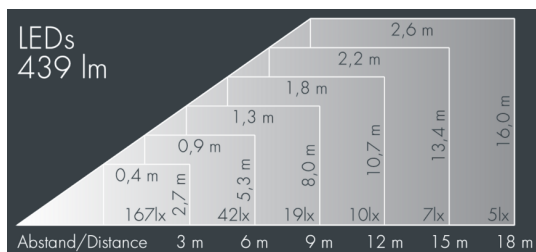

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, wall mounting: 2 drilled holes \varnothing 7 mm, spacing 60 mm, cable gland: up to \varnothing 13 mm, recessed or surface mounted cable, connecting terminal: 3 pole, gimbal mounted, tilt range: 0-15, integral control gear, CRI > 80, max 2 SDCM, service life $L_{90/B_{10}} > 50.000$ h, Beam angle (FWHM): 47° / 8°, luminous flux: 439 lm, wattage: 7 W, delivered lumens 63 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,025 m², dimensions (L×H×W): 191 × 110 × 130 mm, weight 3,657 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	7 W	Beam angle (FWHM)	47° / 8°
Delivered lumens	63 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime to 25° C	$L_{90/B_{10}} > 50.000$ h	Windage area	0,025m ²
Control gear	on / off	Dimensions	191 × 110 × 130 mm
Input voltage AC	220 – 240 V	Weight	3,66 kg
Voltage protection	1 kV L/N 0 kV L/PE		