
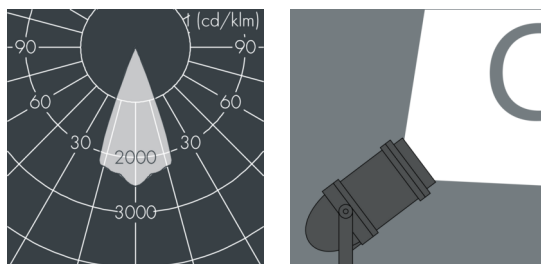


## Nightspot B Gobo Projector

8 987 266 169

55 W, 1483 lm, 3000 K warm white, DALI,  
45 mm focal length 41°

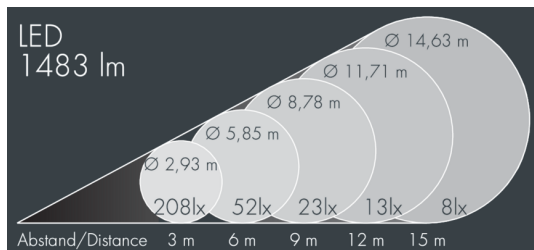

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes Ø 9mm, tilt range: 80°, cable gland: M20, connecting terminal: 5 pole, tilt range: 180°, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 80, Beam angle (FWHM): 41°, luminous flux: 1483 lm, wattage: 55 W, delivered lumens 27 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,085 m<sup>2</sup>, dimensions: Ø 240 mm, width 425 mm, weight 7.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 41°                    |
| Delivered lumens           | 27 lm/W              | Housing colour              | white RAL 9002         |
| Light source               | LED 3000 K           | Power supply cable          | Ø 6 – 10 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP67                   |
| Control gear               | DALI                 | Protection class            | I                      |
| Input voltage AC           | 220 – 240 V          | Impact resistance           | IK08                   |
| Input voltage DC           | 220 – 240 V          | Windage area                | 0,085m <sup>2</sup>    |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Dimensions                  | Ø 240 mm, width 425 mm |
| Luminaires per B16A / C16A | 23 / 39              | Weight                      | 7,80 kg                |
|                            |                      | Max. ambient temperature ta | 35°                    |