


8 983 045 579

Abstand/Distance	3 m	6 m	9 m	12 m	15 m	18 m
Beam Diameter	2,2 m	4,4 m	6,6 m	8,8 m	11,0 m	13,2 m
Illuminance (lx)	479 lx	120 lx	53 lx	30 lx	19 lx	13 lx

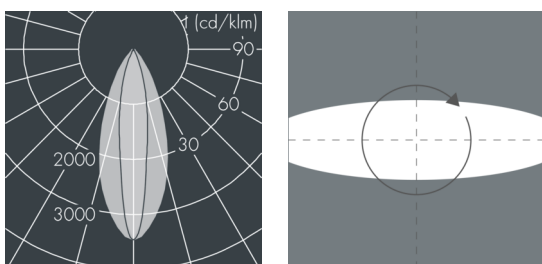

Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP 67 IK 08

Specification

Wattage	28 W	Beam angle (FWHM)	17° / 40°
Delivered lumens	75 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	Ø 8 – 15 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	II
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,035m²
Input voltage AC	220 – 240 V	Dimensions	Ø 180 mm, width 200 mm
Input voltage DC	190 – 245 V	Weight	2,70 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°