





8 983 255 549

LED
2459 lm

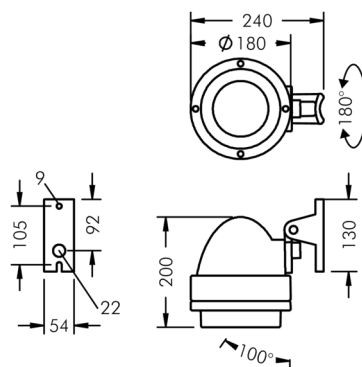

Abstand / Distance	3 m	4 m	8 m	12 m	16 m	20 m
Beam Diameter	Ø 1,31 m	Ø 1,62 m	Ø 2,62 m	Ø 3,93 m	Ø 5,24 m	Ø 6,55 m
Beam Spread	834lx	208lx	93lx	52lx	33lx	

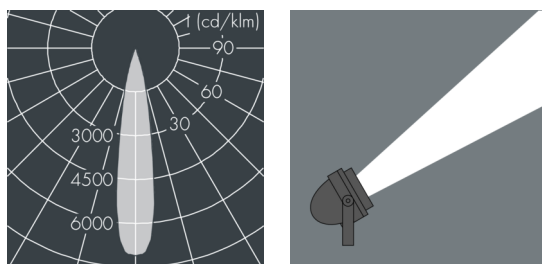

Specification

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP 67 IK 08

Wattage	28 W	Beam angle (FWHM)	19°
Delivered lumens	88 lm/W	Housing colour	silver grey
Light source	LED 4000 K	Power supply cable	Ø 8 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	II
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,035m²
Input voltage AC	220 – 240 V	Dimensions	Ø 180 mm, width 200 mm
Input voltage DC	190 – 245 V	Weight	2,90 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	35°