
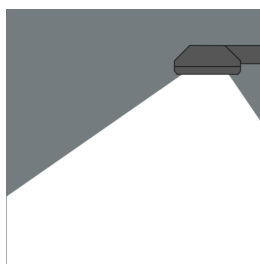
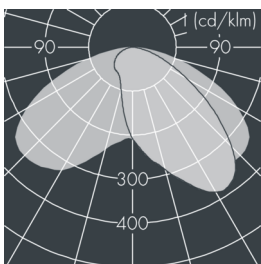


## Superlight

8 829 065 059

18 x 1,7 W, 1624 lm, 4300 K neutral white, asymmetrical 57° / 138°

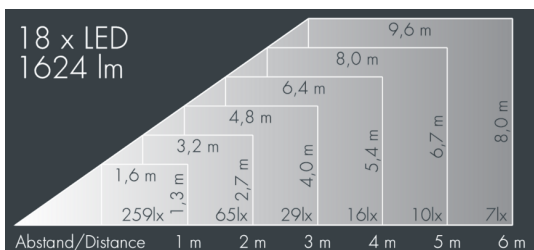

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, with prismatic glass for diffuse and uniform light distribution, silicon gasket, with 4 stainless steel screws, wall box: 2 drilled holes Ø 8.5 mm, spacing 70 mm, cable gland: "recessed or surface mounted cable, cable entry up to Ø 10 mm, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), CRI > 70, Beam angle (FWHM): 57° / 138°, luminous flux: 1624 lm, wattage: 31 W, delivered lumens 52 lm/W, protection type IP54, protection class I, windage area 0,06 m<sup>2</sup>, dimensions (L×H×W): 305 × 75 × 172 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 54

## Specification

Wattage	31 W	Beam angle (FWHM)	57° / 138°
Delivered lumens	52 lm/W	Housing colour	white RAL 9002
Light source	LED 4300 K	Protection type	IP54
Color Rendering Index	CRI > 70	Protection class	I
Control gear	on / off	Windage area	0,06m <sup>2</sup>
		Dimensions	305 × 75 × 172 mm
		Weight	3,00 kg