
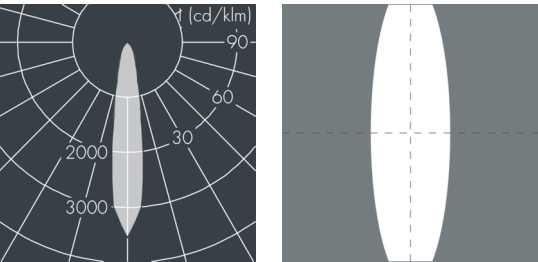


### Superlight

8 866 140 029

For metal halide lamps (HIT-DE) und high pressur sodium vapour lamps (HST-DE)

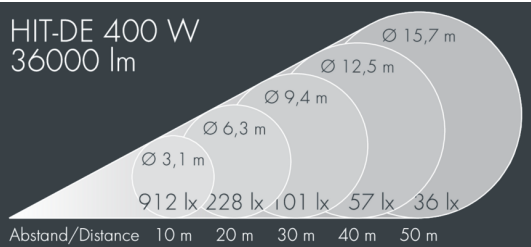

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, Luminaire with ribbed glass, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 6 drilled holes Ø 10 mm, spacing 70 mm (120 mm, 200 mm), 1 centre hole Ø 22 mm, tilt range: 150°, cable gland: M20, connecting terminal: 3 pole, rotationally symmetrical high gloss aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, Beam angle (FWHM): 57°, luminous flux: 36000 lm, wattage: 400 W, delivered lumens 82 lm/W, protection type IP65, protection class I, windage area 0,19 m², dimensions (L×H×W): 445 × 190 × 420 mm, weight 18.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



### Specification

Wattage	400 W	Beam angle (FWHM)	57°
Delivered lumens	82 lm/W	Housing colour	black RAL 7021
Control gear	on / off	Power supply cable	Ø 8 – 15 mm
		Protection type	IP65
		Protection class	I
		Windage area	0,19m²
		Dimensions	445 × 190 × 420 mm
		Weight	18,50 kg