




## Superlight Compact LED

8 890 055 429

48 W, 4437 lm, 4000 K neutral white,  
linear vertical 11°

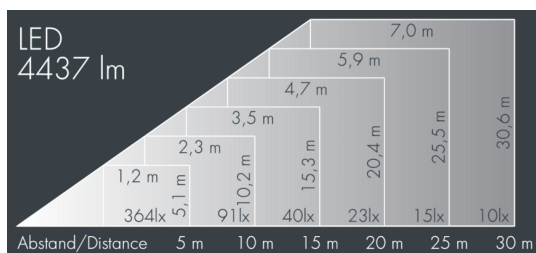

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes Ø 8.5 mm, spacing 70 mm, 1 centre hole Ø 17 mm, tilt range: 120°, cable gland: 2 x M20, cable entry: 2, connecting terminal: 3 pole, highly efficient anodized rotationally symmetrical reflector with matt finish, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 11°, luminous flux: 4437 lm, wattage: 48 W, delivered lumens 92 lm/W, protection type IP67, protection class I, impact resistance IK09, windage area 0,04 m², dimensions (L×H×W): 192 × 162 × 140 mm, weight 2.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP67 IK09

## Specification

|                       |            |                   |                    |
|-----------------------|------------|-------------------|--------------------|
| Wattage               | 48 W       | Beam angle (FWHM) | 11°                |
| Delivered lumens      | 92 lm/W    | Housing colour    | silver grey        |
| Light source          | LED 4000 K | Protection type   | IP67               |
| Color Rendering Index | CRI > 80   | Protection class  | I                  |
| Control gear          | on / off   | Impact resistance | IK09               |
|                       |            | Windage area      | 0,04m²             |
|                       |            | Dimensions        | 192 × 162 × 140 mm |
|                       |            | Weight            | 2,60 kg            |