

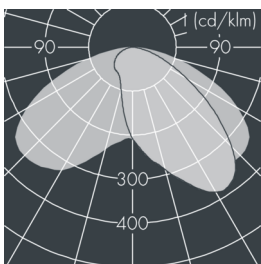


## Superlight

8 829 065 059

18 x 1,7 W, 1624 lm, 4300 K neutral white, asymmetrical 57° / 138°

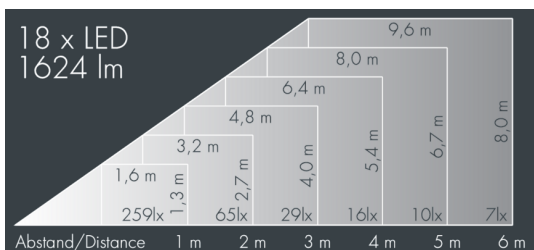

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, with prismatic glass for diffuse and uniform light distribution, silicon gasket, with 4 stainless steel screws, wall box: 2 drilled holes Ø 8.5 mm, spacing 70 mm, cable gland: "recessed or surface mounted cable, cable entry up to Ø 10 mm, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), CRI > 70, Beam angle (FWHM): 57° / 138°, luminous flux: 1624 lm, wattage: 31 W, delivered lumens 52 lm/W, protection type IP54, protection class I, windage area 0,06 m<sup>2</sup>, dimensions (L×H×W): 305 × 75 × 172 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



## Specification

Wattage	31 W	Beam angle (FWHM)	57° / 138°
Delivered lumens	52 lm/W	Housing colour	white RAL 9002
Light source	LED 4300 K	Protection type	IP54
Color Rendering Index	CRI > 70	Protection class	I
Control gear	on / off	Windage area	0,06m <sup>2</sup>
		Dimensions	305 × 75 × 172 mm
		Weight	3,00 kg