



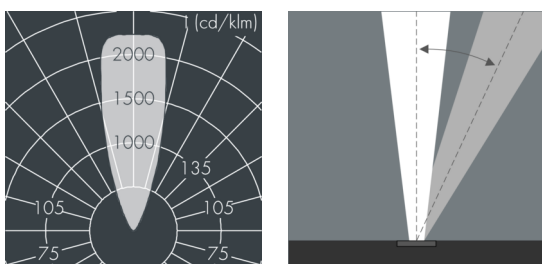

## Uplight 280

8 661 119 049

5 × LED, 772 lm, RGBW (3000 K) warm white, DMX, medium wide beam, adjustable 34°

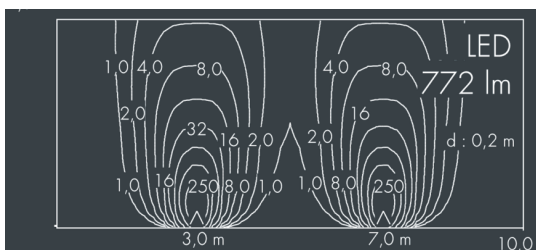

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing of corrosion-resistant die-cast aluminum AlSi112, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, dark screenprint, with slip resistant glass (R13 according to DIN EN 51130), for loads up to max. 5000 kg (according to IEC / EN 60598-2-13), silicon gasket, Cover and closure by 6 stainless steel screws, cable gland: M20, connecting terminal: 6 pole, lockable, tilt range: 0-15, precise PMMA optics, 0,8 m cable Ho7RN-F3G1,5, integral control gear, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 34°, luminous flux: 772 lm, wattage: 23 W, delivered lumens 34 lm/W, protection type IP67, protection class I, impact resistance IK10, dimensions: Ø 280 mm, width 125 mm, weight 6.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK10

## Specification

|                    |                      |                             |                        |
|--------------------|----------------------|-----------------------------|------------------------|
| Wattage            | 23 W                 | Beam angle (FWHM)           | 34°                    |
| Delivered lumens   | 34 lm/W              | Housing colour              | black RAL 7021         |
| Light source       | LED RGBW (3000 K)    | Power supply cable          | Ø 6 – 13 mm            |
| Colour tolerance   | max 2 SDCM           | Protection type             | IP67                   |
| Lifetime ta 25° C  | L90/B10 > 50.000 h   | Protection class            | I                      |
| Control gear       | DMX                  | Impact resistance           | IK10                   |
| Input voltage AC   | 120 – 250 V          | Dimensions                  | Ø 280 mm, width 125 mm |
| Input voltage DC   | 120 – 250 V          | Weight                      | 6,60 kg                |
| Voltage protection | 2 kV L/N   2 kV L/PE | Max. ambient temperature ta | 30°                    |