





Ecoline

8 793 155 189
9 × 2,5 W, 1686 lm, 4000 K neutral white, DALI,
asymmetrical 36° / 64° ,

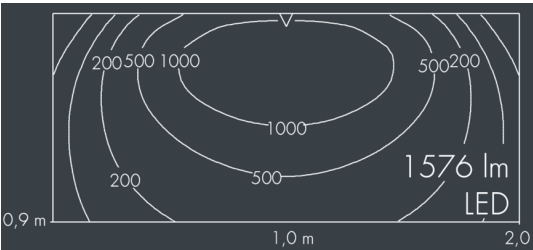

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant
die-cast aluminum AlSi12, polyester powder coated by
high-quality and UV-stabilized coating process, Colour: silver grey
, all exterior parts are stainless steel, UV stabilised,
impact-resistant polycarbonate cover with partial frosting for
uniform light diffraction, silicon gasket, closure with 2 stainless
steel screws, wall arms: 2 drilled holes Ø 6.5 mm, spacing L2,
tilt range: 220°, cable gland: M20, connecting terminal: 5 pole,
highly efficient optics made of transparent thermoplastic for
precise lighting tasks , CRI > 80, max 2 SDCM,
service life L90/B10 > 50.000 h, luminous flux: 1686 lm,
wattage: 23 W, delivered lumens 75 lm/W, protection type
IP65, protection class I, impact resistance IK10, windage area
0,1 m², dimensions (L×H×W): 962 × 58 × 54 mm, weight
3.6 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE and ENEC marks.



Specification

Wattage	23 W	Housing colour	silver grey
Delivered lumens	75 lm/W	Power supply cable	Ø 6 – 10 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,1m²
Control gear	DALI	Dimensions	962 × 58 × 54 mm
Input voltage AC	220 – 240 V	Weight	3,60 kg
Input voltage DC	195 – 255 V	Max. ambient temperature ta	40°
Voltage protection	1 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	28 / 46		