
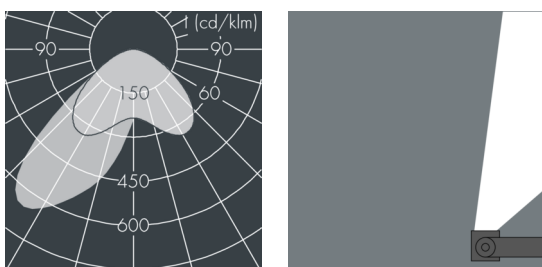


## Ecoline modular system luminaire, middle

8 798 345 089

1,5 × 2,5 W, 2812 lm, 4000 K neutral white, asymmetrical 36° / 64°

L<sub>1</sub> = 1542 mm

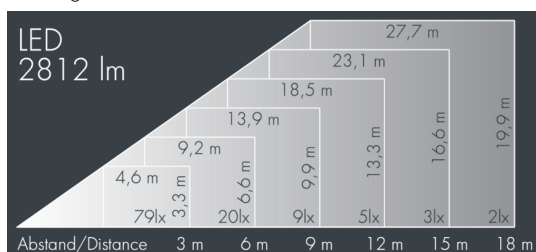

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, with stainless steel couplings on left and right side, tilt range: 220°, cable gland: M20, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, CRI > 80, max 2 SDCM, service life L<sub>90</sub>/B<sub>10</sub> > 50.000 h, luminous flux: 2812 lm, wattage: 38 W, delivered lumens 75 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,09 m<sup>2</sup>, dimensions (L×H×W): 1542 × 58 × 54 mm, weight 4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.




 IP65 IK10

## Specification

Wattage	38 W	Housing colour	black RAL 7021
Delivered lumens	75 lm/W	Power supply cable	Ø 6 – 10 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L <sub>90</sub> /B <sub>10</sub> > 50.000 h	Windage area	0,09m <sup>2</sup>
Control gear	on / off	Dimensions	1542 × 58 × 54 mm
Input voltage AC	198 – 264 V	Weight	4,00 kg
Input voltage DC	176 – 280 V	Max. ambient temperature ta	40°
Voltage protection	4 kV L/N   4 kV L/PE		