




Fluxa C

8 278 158 009

For und

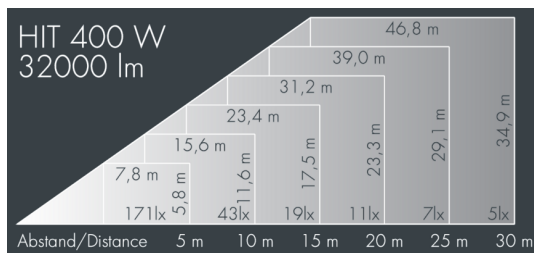

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, 230 mm arm, 2 drilled holes $\varnothing 10.5$ mm, spacing 58 mm, cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 32000 lm, wattage: 400 W, delivered lumens 73 lm/W, protection type IP54, protection class I, windage area 0,3 m², dimensions (L×H×W): 730 × 230 × 430 mm, weight 24,6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP 54

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	400 W	Housing colour	silver grey
Delivered lumens	73 lm/W	Power supply cable	$\varnothing 8 - 15$ mm
Control gear	on / off	Protection type	IP54
		Protection class	I
		Windage area	0,3m ²
		Dimensions	730 × 230 × 430 mm
		Weight	24,60 kg