


Metaspaces

8 215 347 499
6 × 8,6 W, 6985 lm, 2700 K warm white, Zhaga 18 -
down,
Street Optic 36° / 155°

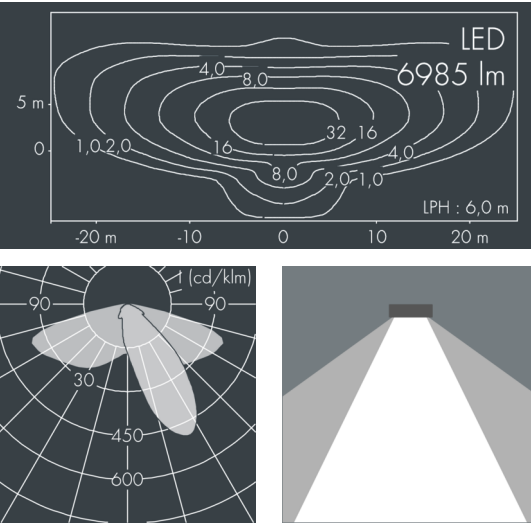

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho7RN-F3G1, PMMA linsen, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 36° / 155°, luminous flux: 6985 lm, wattage: 53 W, delivered lumens 133 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,056 m², dimensions: Ø 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

IP 65 IK 08

Specification

Wattage	53 W	Beam angle (FWHM)	36° / 155°
Delivered lumens	133 lm/W	Housing colour	black RAL 7021
Light source	LED 2700 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Control gear	Zhaga 18 - unten	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,056m²
Input voltage DC	220 – 240 V	Dimensions	Ø 376 mm, width 112 mm
Voltage protection	6 kV L/N 8 kV L/PE	Weight	5,00 kg
Luminaires per B16A / C16A	10 / 16	Max. ambient temperature ta	45°