
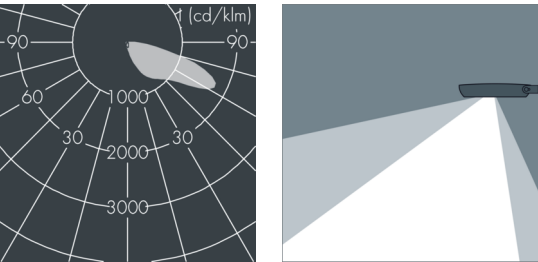


Metaspace

8 215 357 549
6 × 6,3 W, 3599 lm, 2700 K warm white, Zhaga 18 -
up / down,
asymmetrical beam 63°

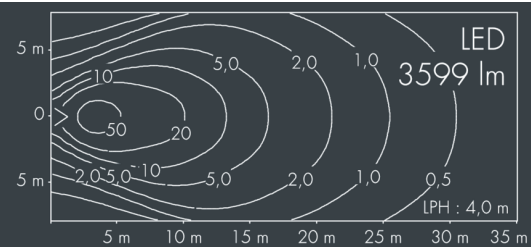

Customized solutions and modifications are possible: Special RAL,
DB or NCS colours as polyester powder coat, luminaires in
2700 K and other colour temperatures and versions for high
ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12,
polyester powder coated by high-quality and UV-stabilized
coating process, Colour: silver grey , all exterior parts are
stainless steel, tempered high efficiency safety glass, anti-reflective
coating from 1 side, dark screenprint, silicon gasket, closure with
5 stainless steel screws, with pole top fitter for 1 luminaire for
poles Ø 60/76 mm, fastening with 4 set screws M8,
cable gland: M20, with 8 m cable Ho7RN-F3G1,
connecting terminal: 3 pole, highly efficient metallized PC
reflector, integral driver (AC/DC), CRI > 80, 3,
service life L80/B20 > 50.000 h, luminous flux: 3599 lm,
wattage: 38 W, delivered lumens 95 lm/W, protection type
IP65, protection class I, impact resistance IK08, windage area
0,056 m², dimensions (L×H×W): 376 × 112 × 15 mm, weight
5.1 kg

The modular luminaire design makes the replacement of
components possible. The product meets the demands of the
applicable EU guidelines and product safety regulations and
bears the CE mark.

 IP65 IK08

Specification

Wattage	38 W	Housing colour	silver grey
Delivered lumens	95 lm/W	Protection type	IP65
Light source	LED 2700 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Colour tolerance	3	Windage area	0,056m²
Lifetime ta 25° C	L80/B20 > 50.000 h	Dimensions	376 × 112 × 15 mm
Control gear	Zhaga 18 - oben / unten	Weight	5,10 kg
Input voltage AC	220 – 240 V	Max. ambient temperature ta	40°
Input voltage DC	220 – 240 V		
Voltage protection	6 kV L/N 10 kV L/PE		
Luminaires per B16A / C16A	20 / 33		