




Metaspot 3

8 243 259 049
49 W, 1935 lm, RGBW (3000 K) DMX,
medium wide beam 36°

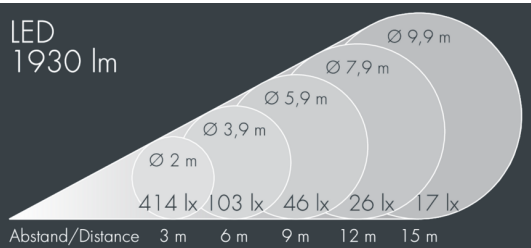

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 40 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 6 pole, light source completely shielded, high gloss aluminium reflector, integral driver (AC/DC), Beam angle (FWHM): 36°, luminous flux: 1935 lm, wattage: 49 W, delivered lumens 39 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,055 m², dimensions: Ø 201 mm, width 272 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|----------------------------|-------------------|-----------------------------|------------------------|
| Wattage | 49 W | Beam angle (FWHM) | 36° |
| Delivered lumens | 39 lm/W | Housing colour | silver grey |
| Light source | LED RGBW (3000 K) | Power supply cable | Ø 6 – 11 mm |
| Control gear | DMX | Protection type | IP65 |
| Input voltage AC | 120 – 277 V | Protection class | I |
| Input voltage DC | 120 – 250 V | Impact resistance | IK08 |
| Luminaires per B16A / C16A | 22 / 22 | Windage area | 0,055m² |
| | | Dimensions | Ø 201 mm, width 272 mm |
| | | Weight | 5,00 kg |
| | | Max. ambient temperature ta | 35° |