
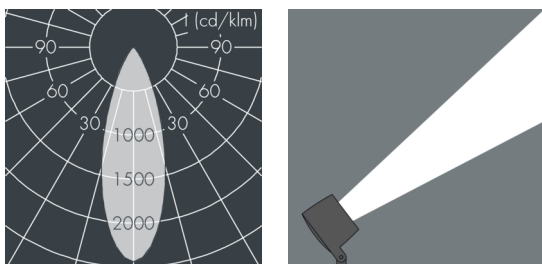


Monocube 4 RGBW

8 264 069 049

5 × max. W47 W, 1578 lm,
 RGBW (3000 K) warm white, DMX,
 medium wide beam 33°

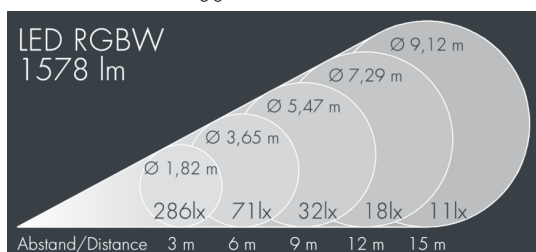

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, 2 drilled holes Ø 7 mm, spacing 30 - 40 mm, 1 centre hole Ø 21 mm, tilt range: 180°, cable gland: 2 x M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 33°, luminous flux: 1578 lm, wattage: 48 W, delivered lumens 33 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,022 m², dimensions (L×H×W): 152 × 120 × 152 mm, weight 2.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|---------------------|
| Wattage | 48 W | Beam angle (FWHM) | 33° |
| Delivered lumens | 33 lm/W | Housing colour | white RAL 9002 |
| Light source | LED RGBW (3000 K) | Power supply cable | Ø 6 – 13 mm |
| Lifetime ta 25° C | L70/B20 > 50.000 h | Protection type | IP65 |
| Control gear | DMX | Protection class | I |
| Input voltage AC | 120 – 250 V | Impact resistance | IK08 |
| Input voltage DC | 120 – 250 V | Windage area | 0,022m ² |
| Voltage protection | 2 kV L/N 2 kV L/PE | Dimensions | 152 × 120 × 152 mm |
| Luminaires per B16A / C16A | 38 / 45 | Weight | 2,70 kg |
| | | Max. ambient temperature ta | 35° |