
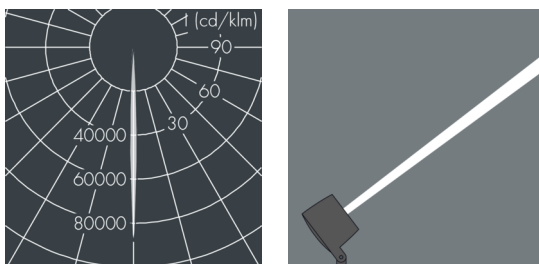


MonoFlood 4

8 204 049 009

97 W, 2670 lm, RGBW (3000 K) warm white, DMX, extreme narrow beam 4°

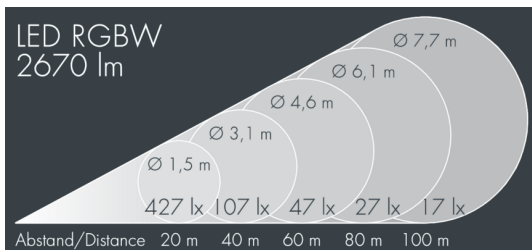

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, mounting bracket: 2 drilled holes \varnothing 7 mm, spacing 40 - 60 mm, 1 centre hole \varnothing 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), Beam angle (FWHM): 4°, luminous flux: 2670 lm, wattage: 97 W, delivered lumens 28 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,046 m², dimensions (L×H×W): 250 × 176 × 250 mm, weight 6.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|-------------------------|
| Wattage | 97 W | Beam angle (FWHM) | 4° |
| Delivered lumens | 28 lm/W | Housing colour | black RAL 7021 |
| Light source | LED RGBW (3000 K) | Power supply cable | \varnothing 6 - 13 mm |
| Control gear | DMX | Protection type | IP67 |
| Input voltage AC | 120 - 250 V | Protection class | I |
| Input voltage DC | 120 - 275 V | Impact resistance | IK08 |
| Voltage protection | 3 kV L/N 4 kV L/PE | Windage area | 0,046m ² |
| Luminaires per B16A / C16A | 8 / 13 | Dimensions | 250 × 176 × 250 mm |
| | | Weight | 6,90 kg |
| | | Max. ambient temperature ta | 35° |