
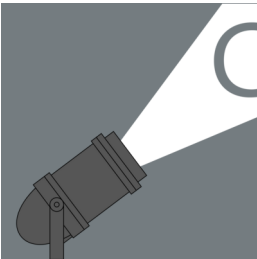
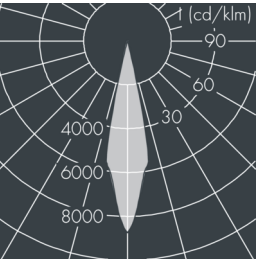


Monospot Gobo

8 905 244 249
55 W, 1680 lm, 6500 K cold white, 1-10V,
85 mm focal length 22°

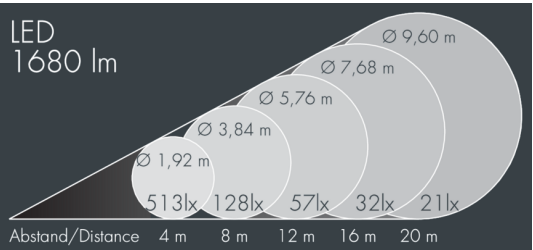

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral 1-10 V driver, CRI > 70, Beam angle (FWHM): 22°, luminous flux: 1680 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m², dimensions: Ø 215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|-----------------------|------------|-----------------------------|------------------------|
| Wattage | 55 W | Beam angle (FWHM) | 22° |
| Delivered lumens | 31 lm/W | Housing colour | black RAL 7021 |
| Light source | LED 6500 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 70 | Protection type | IP65 |
| Control gear | 1-10V | Protection class | I |
| | | Impact resistance | IK08 |
| | | Windage area | 0,076m² |
| | | Dimensions | Ø 215 mm, width 390 mm |
| | | Weight | 8,00 kg |
| | | Max. ambient temperature ta | 35° |