
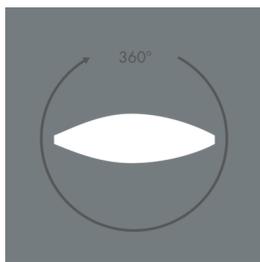
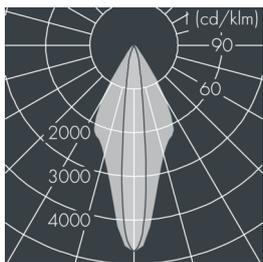


Monospot+

8 996 356 079

53 W, 3794 lm, 3000 K warm white,
linear, rotatable 12° / 37°

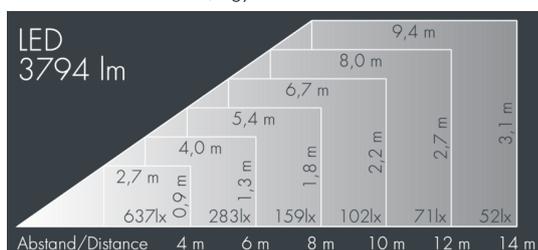

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 3 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes \varnothing 8.5 mm, spacing 42 mm, 1 centre hole \varnothing 20 mm, tilt range: 33°, swivel range 360°, cable gland: M20, connecting terminal: 3 pole, highly efficient aluminum reflector, integral driver (AC/DC), CRI > 80, service life L80/B10 > 50.000 h, Beam angle (FWHM): 12° / 37°, luminous flux: 3794 lm, wattage: 53 W, delivered lumens 72 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,059 m², dimensions: \varnothing 194 mm, width 231 mm, weight 3,8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	53 W	Beam angle (FWHM)	12° / 37°
Delivered lumens	72 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	\varnothing 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Lifetime to 25° C	L80/B10 > 50.000 h	Protection class	I
Control gear	on / off	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,059m ²
Input voltage DC	220 – 240 V	Dimensions	\varnothing 194 mm, width 231 mm
Voltage protection	2 kV L/N 2 kV L/PE	Weight	3,80 kg
Luminaires per B16A / C16A	23 / 39	Max. ambient temperature to	35°