
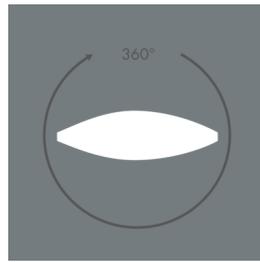
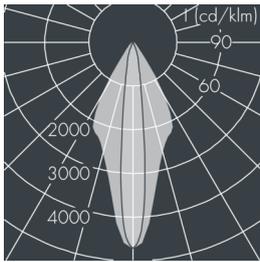


## Monospot+

8 996 468 279

53 W, 2732 lm, 2200 K warm white, DALI D4i, linear, rotatable 12° / 37°

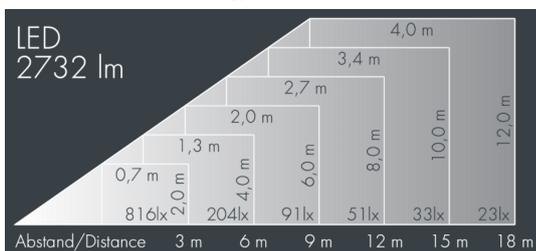

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 40 mm, tilt range: tilt range 33°, swivel range 360°, cable gland: M20, connecting terminal: 5 pole, highly efficient aluminum reflector, integral driver (AC/DC), CRI > 80, service life L80/B10 > 50.000 h, Beam angle (FWHM): 12° / 37°, luminous flux: 2732 lm, wattage: 53 W, delivered lumens 52 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,049 m<sup>2</sup>, dimensions: Ø 194 mm, width 231 mm, weight 3,8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

Wattage	53 W	Beam angle (FWHM)	12° / 37°
Delivered lumens	52 lm/W	Housing colour	white RAL 9002
Light source	LED 2200 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Lifetime to 25° C	L80/B10 > 50.000 h	Protection class	I
Control gear	DALI D4i	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,049m <sup>2</sup>
Input voltage DC	220 – 240 V	Dimensions	Ø 194 mm, width 231 mm
Voltage protection	2 kV L/N   2 kV L/PE	Weight	3,80 kg
Luminaires per B16A / C16A	23 / 39	Max. ambient temperature to	45°