
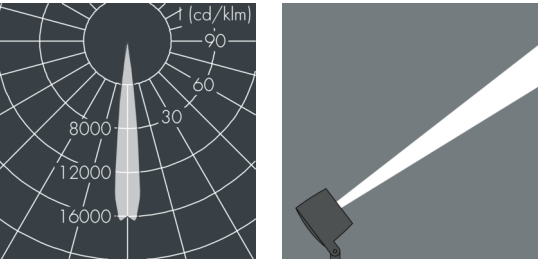


Monospot S4

8 994 049 019  
48 W, 1709 lm, RGBW (3000 K) DMX,  
narrow beam 13°

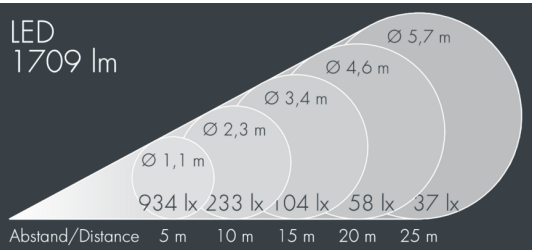

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 30-40 mm, 1 centre hole Ø 17 mm, tilt range: 180°, cable gland: 2 x M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 13°, luminous flux: 1709 lm, wattage: 48 W, delivered lumens 36 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,025 m², dimensions: Ø 194 mm, width 124 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 48 W                 | Beam angle (FWHM)           | 13°                    |
| Delivered lumens           | 36 lm/W              | Housing colour              | black RAL 7021         |
| Light source               | LED RGBW (3000 K)    | Power supply cable          | Ø 6 – 9 mm             |
| Lifetime ta 25° C          | L70/B20 > 50.000 h   | Protection type             | IP67                   |
| Control gear               | DMX                  | Protection class            | I                      |
| Input voltage AC           | 220 – 240 V          | Impact resistance           | IK08                   |
| Input voltage DC           | 220 – 240 V          | Windage area                | 0,025m²                |
| Voltage protection         | 2 kV L/N   2 kV L/PE | Dimensions                  | Ø 194 mm, width 124 mm |
| Luminaires per B16A / C16A | 38 / 38              | Weight                      | 2,80 kg                |
|                            |                      | Max. ambient temperature ta | 35°                    |