
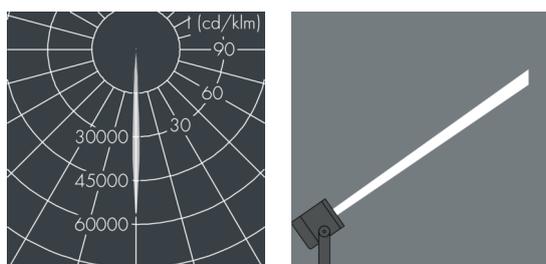


## Multispot 1

8 221 556 009

2 × 2 W, 381 lm, 3000 K warm white,  
extreme narrow beam 5°

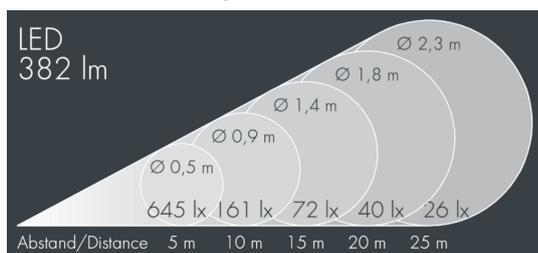

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 1 elongated hole  $\varnothing$  7 mm, spacing 18 mm, 1 centre hole  $\varnothing$  8.5 mm, tilt range: 170°, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM#, service life  $L_{90}/B_{10}$  > 50.000 h, Beam angle (FWHM): 5°, luminous flux: 381 lm, wattage: 6 W, delivered lumens 64 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0139 m<sup>2</sup>, dimensions:  $\varnothing$  99 mm, width 147 mm, weight 1.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	6 W	Beam angle (FWHM)	5°
Delivered lumens	64 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	$\varnothing$ 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM#	Protection class	I
Lifetime $t_{a 25^\circ C}$	$L_{90}/B_{10}$ > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,0139m <sup>2</sup>
Input voltage AC	220 – 240 V	Dimensions	$\varnothing$ 99 mm, width 147 mm
Input voltage DC	220 – 230 V	Weight	1,30 kg
Voltage protection	2 kV L/N   2 kV L/PE	Max. ambient temperature $t_a$	40°
Luminaires per B16A / C16A	50 / 85		