
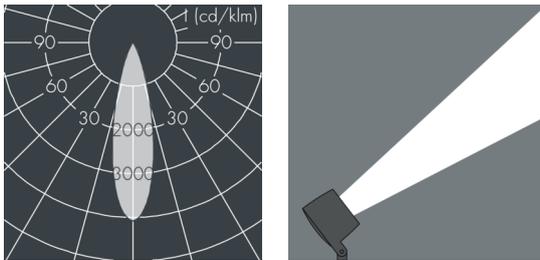


Multispot 2

8 222 748 029

15 W, 835 lm, 2200 K warm white,
medium wide beam

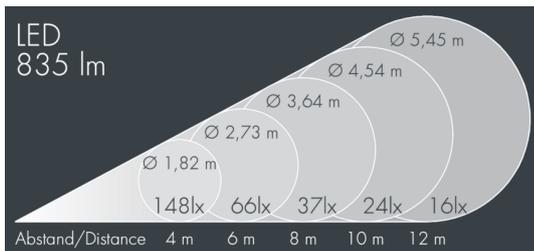

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 2 drilled holes \varnothing 7 mm, spacing 32 mm, 1 centre hole \varnothing 17 mm, tilt range: 170°, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, luminous flux: 835 lm, wattage: 15 W, delivered lumens 58 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0234 m², dimensions: \varnothing 123 mm, width 173 mm, weight 2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	15 W	Housing colour	black RAL 7021
Delivered lumens	58 lm/W	Power supply cable	\varnothing 6 – 13 mm
Light source	LED 2200 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Control gear	on / off	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,0234m ²
Input voltage DC	220 – 240 V	Dimensions	\varnothing 123 mm, width 173 mm
Voltage protection	2 kV L/N 2 kV L/PE	Weight	2,00 kg
Luminaires per B16A / C16A	50 / 50	Max. ambient temperature ta	40°