
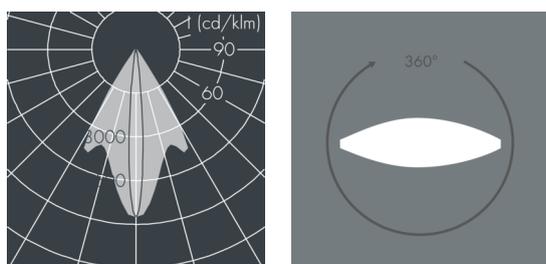


Multispot 3

8 227 068 079

27 W, 1464 lm, 2200 K warm white,
linear, rotatable 10° / 59°

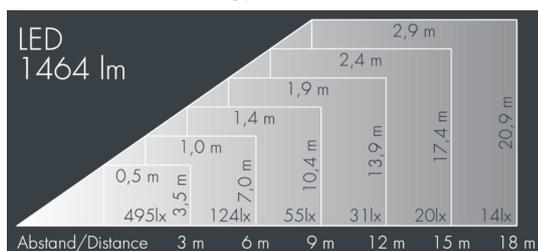

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, silicon gasket, closure with 2 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes \varnothing 9 mm, spacing 97 mm, 1 centre hole \varnothing 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, Beam angle (FWHM): 10° / 59°, luminous flux: 1464 lm, wattage: 27 W, delivered lumens 54 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0284 m², dimensions: \varnothing 123 mm, width 130 mm, weight 2.4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	27 W	Beam angle (FWHM)	10° / 59°
Delivered lumens	54 lm/W	Housing colour	white RAL 9002
Light source	LED 2200 K	Power supply cable	\varnothing 6 - 13 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,0284m ²
		Dimensions	\varnothing 123 mm, width 130 mm
		Weight	2,40 kg
		Max. ambient temperature ta	35°