
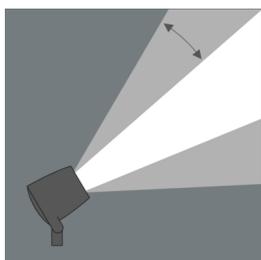


Multispot 2

8 222 047 169

15 W, 697 lm, 2700 K warm white, DALI, Vario Optic

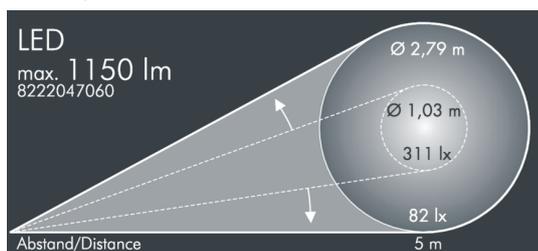

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification

Wattage	15 W	Housing colour	black RAL 7021
Delivered lumens	48 lm/W	Protection type	IP65
Light source	LED 2700 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Control gear	DALI	Windage area	0,049m ²
Input voltage AC	220 – 240 V	Dimensions	Ø 123 mm, width 167 mm
Input voltage DC	220 – 240 V	Weight	2,40 kg
Voltage protection	2 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	50 / 50		

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 32 mm, 1 centre hole Ø 17 mm, tilt range: 170°, cable gland: M20, connecting terminal: 5 pole, PMMA lens, integral driver (AC/DC), CRI > 80, luminous flux: 697 lm, wattage: 15 W, delivered lumens 48 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,049 m², dimensions: Ø 123 mm, width 167 mm, weight 2.4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08