
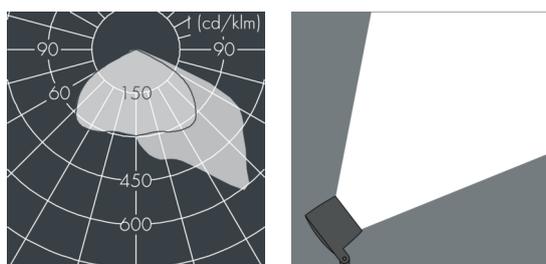


## Multispot 3

8 223 066 099

27 W, 2333 lm, 3000 K warm white,  
asymmetrical beam

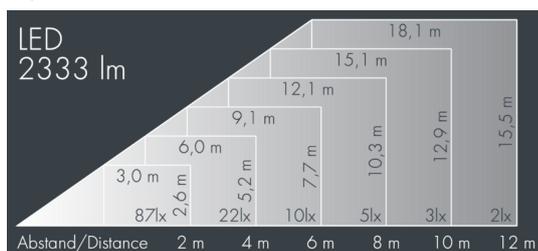

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 2 drilled holes  $\varnothing$  7 mm, spacing 35 mm, 1 centre hole  $\varnothing$  17 mm, tilt range:  $170^\circ$ , cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, luminous flux: 2333 lm, wattage: 27 W, delivered lumens 87 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,0284 m<sup>2</sup>, dimensions:  $\varnothing$  147 mm, width 138 mm, weight 2.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	27 W	Housing colour	white RAL 9002
Delivered lumens	87 lm/W	Power supply cable	$\varnothing$ 6 – 13 mm
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Control gear	on / off	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,0284m <sup>2</sup>
Input voltage DC	220 – 240 V	Dimensions	$\varnothing$ 147 mm, width 138 mm
Voltage protection	2 kV L/N   4 kV L/PE	Weight	2,60 kg
Luminaires per B16A / C16A	50 / 85	Max. ambient temperature ta	35°