
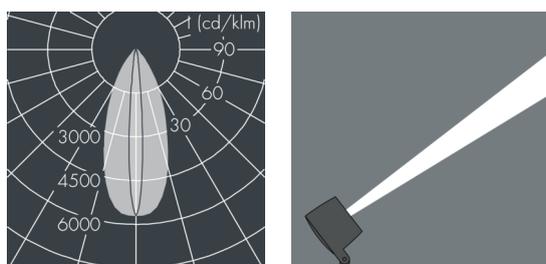


Multispot 3

8 227 346 019

27 W, 1826 lm, 3000 K warm white,
narrow beam 10° / 40°

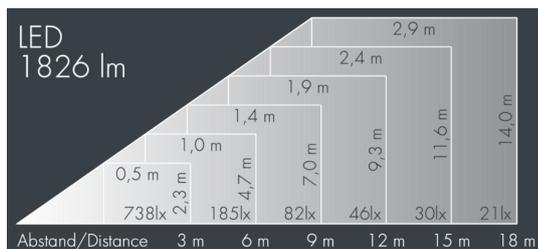

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, 2 tempered safety glasses: waterproof space for optical film and honeycomb louvres, dark screenprint, silicon gasket, closure with 2 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminium, 2 drilled holes \varnothing 9 mm, spacing 97 mm, 1 centre hole \varnothing 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, Beam angle (FWHM): 10° / 40°, luminous flux: 1826 lm, wattage: 27 W, delivered lumens 68 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,031 m², dimensions: \varnothing 147 mm, width 137 mm, weight 2.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	27 W	Beam angle (FWHM)	10° / 40°
Delivered lumens	68 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L80/B10 > 50.000 h	Windage area	0,031 m ²
Control gear	on / off	Dimensions	\varnothing 147 mm, width 137 mm
		Weight	2,60 kg