
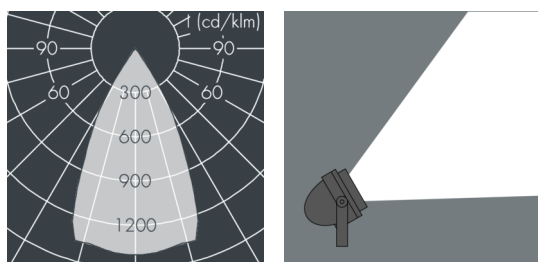


Nightspot A2

8 983 246 259

28 W, 2066 lm, 3000 K warm white, 1-10V,
wide beam 53°

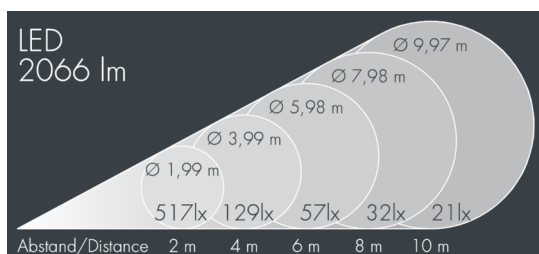

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminium ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, for installation on poles \varnothing 60-100mm, adjustable aluminium mounting base, powder coated: 2 drilled holes \varnothing 9mm, spacing 105mm, 1 centre hole \varnothing 22mm, tilt range: 100°, cable gland: M20, connecting terminal: 5 pole, highly efficient anodized aluminium reflector, with built-in secondary reflector (narrow beam/medium wide beam) for optimal visual comfort and high efficiency, for glare control and reduction of spill light, integral driver (dimnable 1-10V), CRI > 80, max 3 SDCM, service life L80/B10 > 50.000 h, beam angle (FWHM): 53°, luminous flux: 2066 lm, wattage: 28 W, delivered lumens 75 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,035 m², dimensions: \varnothing 180 mm, width 200 mm, weight 2.695 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



A++

IP67 IK08

Specification

Wattage	28 W	Beam angle (FWHM)	53°
Delivered lumens	75 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Power supply cable	\varnothing 8 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	1-10V	Windage area	0,035m ²
		Dimensions	\varnothing 180 mm, width 200 mm
		Weight	2,70 kg
		Max. ambient temperature ta	35°
		Energy efficiency class	A++, A+, A